

CORD SECURED

**LOCKING NUTS, WASHERS
OR BEAM CLAMP**




UNISTRUT OR CEILING BEAM



**RECEPTICAL
RATED
120 VAC**

(230 VAC or 277 VAC)

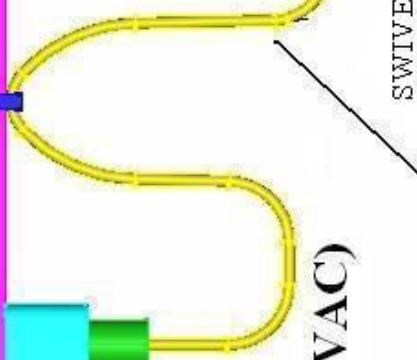


SWIVEL

**CORD AND PLUG
FURNISHED**



**60 lb (27 KILO) MINIMUM RATED
STEEL HOOK W/LATCH
BRIDAL RING OR CHAIN**

**FOR BEST EFFICIENCY
The AIRIUS Thermal Equalizer should
be securely installed as close as possible
to the Ceiling. The AIRIUS air column
should have an unobstructed passage
to the floor. AIRIUS should not be
mounted directly in front of heat
ducts, vents, or near any
high heat source.**

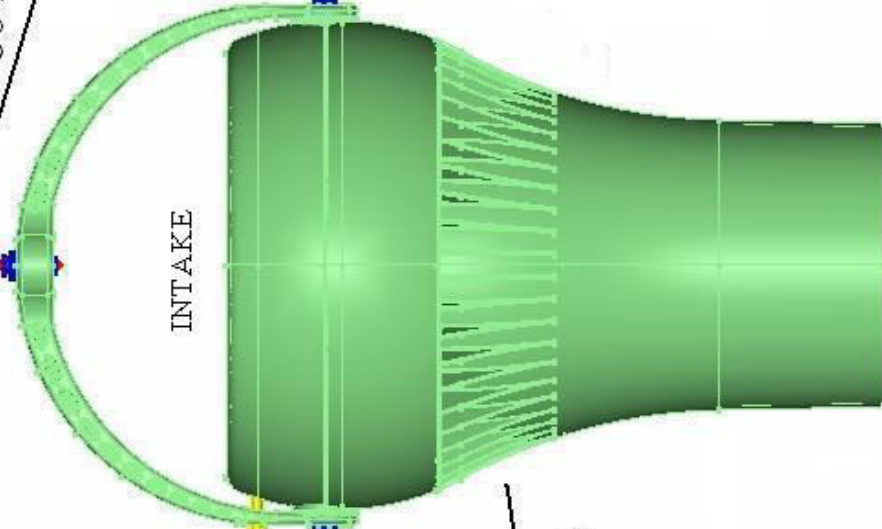

**AIRIUS THERMAL EQUALIZER
W/ EYEBOLT**

CAUTION: Unprotected Moving Blades



THE THERMAL EQUALIZER

MODELS 10, 15, 25, 35

AIRIUS® MOUNTING GUIDELINES

**NO SCALE AIRIUS WEIGHS 12 lb (5.5 KILO)
HEIGHT 22" (56 CM)
DIAMETER 12" (31 CM)**

**MAXIMUM SPACING
1 UNIT PER 1000 SQ FT
(100 SQ METER)
40 FT Diameter Circle
(12 Meter)**